Innometrics
Trusted RFID Cards & Tags Supplier
boby@innometricstech.com
www.innometricstech.com
+0086-15976891693

RFID LABELS



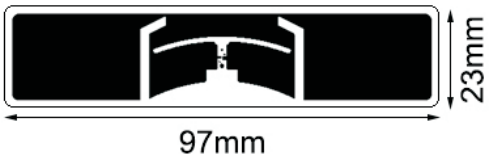

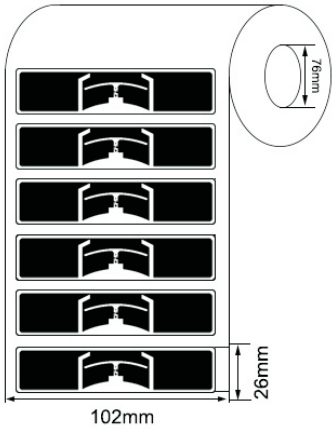

Model:INNO-LBALN-9964

Profile

This is wet inlay/label with 93*19mm antenna, which is optimized for next generation of high memory and high performance. ALN-9954 “G” inlay by Alien Technology IC based “Short” antenna designcontinues the legacy of providing leading performance in an inlay sized right for numerous applications. Fine tuned for windshields and high-dielectric materials, enabling class leading performance & reliability.

Key Features:

- Narrow antenna design.
- Worldwide operation in all RFID UHF bands (860-960 MHz).
- ISO/IEC 18000-6C compliance.
- EPC memory programmable
- Customization available with paper label
- Batch reading

Specification:

Tag Type:	RFID Labels
Chip:	Alien Higgs 9
Memory:	EPC up to 496bits, TID 48bits,User up to 688bits
Material:	Printable paper, PET, PP
Color:	White, CMYK color available
Antenna dimension:	93*19mm
Label dimension:	97*23mm
Protocol:	EPC Class1 Gen2, ISO18000-6C
Operating Frequency:	860-960Mhz
Read Range:	5-15M (may change based different readers and environment)
Adhesive:	Permanent adhesive

Mounting Methods:	Self-Adhesive
Data storage:	up to 10 years
Re-write:	100,000 times
Warranty:	1 year
Operating Temp:	-40℃~+85℃
Weight:	0.02g
Core Inner Diameter:	76mm
Packing Detail:	2500pcs/Reel
Printers supported:	ZEBRA: ZT400 Series, ZT600 Series, ZD500R, ZE500R, etc. SATO: CT4-LX Series, CL4NX, CL4NX Plus, CL6NX Plus, S84-ex,etc
Applications:	Apparel hangtag, Foot wear management, Asset management tracking, etc.